Technical sheet:

MT 625 E






	MI 625 E Cleated off November 10, 2022 at 1	1.07.00 AW 01
Capacities	Metric	
Max. capacity	2500 kg	
Max. lifting height	5.85 m	
Max. outreach	3.40 m	
Weight and dimensions		
Overall length to carriage	l11 3.83 m	
Overall length (with forks)	l1 5.09 m	
Overall width	b1 1.81 m	
Overall height	h17 1.92 m	
Wheelbase	y 2.30 m	
Ground clearance	m4 0.33 m	
Overall cab width	b4 0.79 m	
Tilt-up angle	a4 12 °	
Tilt-down angle	a5 134 °	
External turning radius (over tyres)	Wa1 3.31 m	
Unladen weight (with forks)	4756 kg	
Overall weight	4756 kg	
Tyres type	Pneumatic	
Standard tyres	CAMSO SKS532 12	-16.5
Forks length / width / section	I / e / s 1200 mm x 125 mm /	45 mm
Performances		
Lifting	9 s	
Lowering	6 s	
Extension	6 s	
Retraction	4 s	
Crowd	3 s	
Dump	3.50 s	
Engine		
Drawbar pull (Laden)	2090 daN	
Transmission		
Transmission type	Electrical	
Number of gears (forward / reverse)	1/1	
Parking brake	SAHR	
Service brake	Hydraulic	
Hydraulics		
Hydraulic pump type	Gear pump	
Hydraulic flow / Pressure	78 I/min / 235 b	ar
Tank capacities		<u></u>
Hydraulic oil	661	
Miscellaneous		
Steering wheels (front / rear)	2/2	
Drive wheels (front / rear)	2/2	


MT 625 e - Dimensional drawing





MT 625 e - Load chart

Machine on tyres with forks Metric

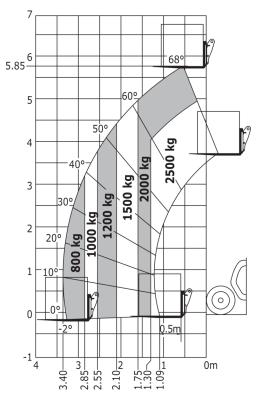





Head Office

B.P. 249 - 430 rue de l'Aubinière 44150 Ancenis Cedex - France Tel: +33 (0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This publication provides a description of the configuration versions and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the versions. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logos as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes