

SVETRUCK®

True Quality

SVETRUCK TMF 25/18 LOGSTACKER



Strength and efficiency in perfect harmony.

The Svetruck TMF is a powerful log stacker, which despite its size is easy to operate and easy to service. The machine has been designed to provide the operator with a good work environment that promotes high production capacity. The overall objective has been for operators to work safely and efficiently throughout the full shift.

The Svetruck TMF is built using well-known quality components and combined with many years of experience and vast know-how, this has resulted in a heavy-duty, highly reliable machine for fast, safe and cost-effective log handling.

► *The Svetruck TMF is the world leader
in efficient log handling*

► Optimized log grapple

Grapple sizes available in sizes from 6.0 to 7.5 m². 360° rotation and uncompromised precision during longitudinal turning.

► Comfortable operator environment

A workplace that guarantees the operator a good day at work. Smooth control of all functions, optimum visibility of the working area. EHC controls as standard.

► Svetruck D5

As standard the Svetruck TMF features Svetruck D5 that constitutes a complete control and monitoring system to provide the operator with a full machine status overview.



► **Tailored to your work needs**

Upon request, Svetruck can adapt machines to perfectly suit the workplace. The Svetruck TMF machines operate at sawmills, paper mills and in pulp industry settings.

► **Easy access**


The Svetruck TMF is a service-friendly machine with large engine compartment hatches and full access to the reversible hydrostatic fan. Optional boom-mounted service platform.



Log pusher



Engine

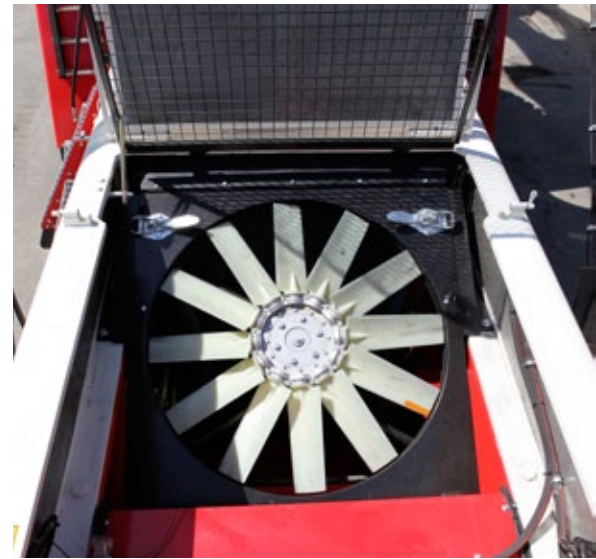


Reversible hydrostatic fan



► **True Quality**

The Svetruck TMF is built using innovative and well-known components. It has been designed and manufactured in our plant in Ljungby, Sweden, relying on over 30 years of truck building experience.

Svetruck TMF 25/18

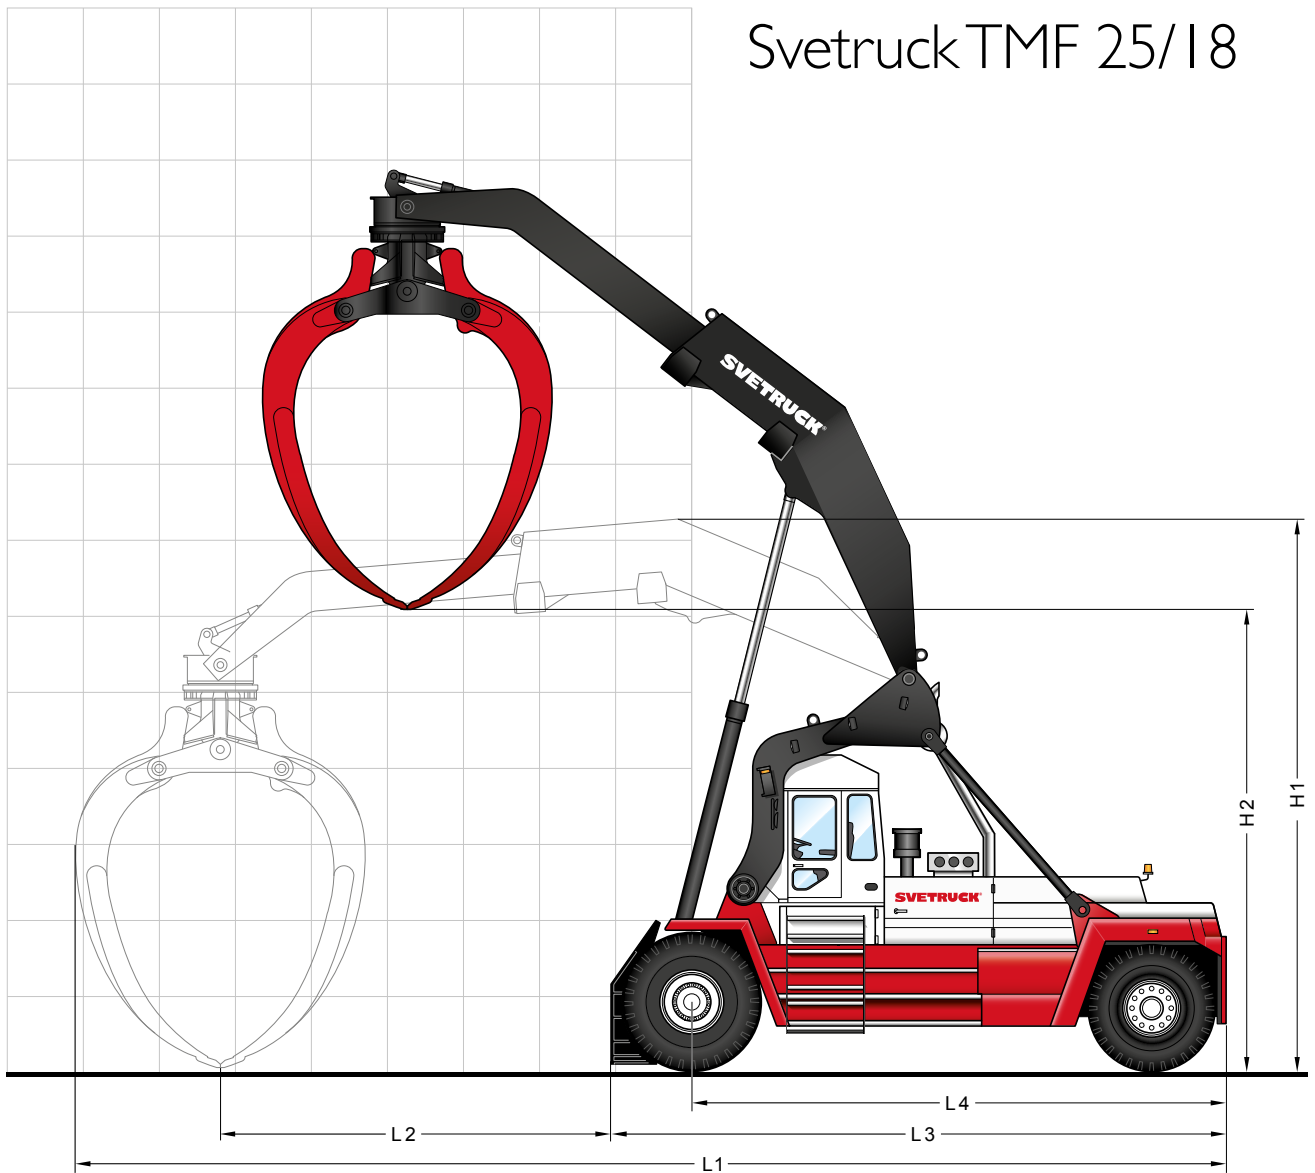

TECHNICAL SPECIFICATIONS

Lift capacity	Telescope retracted.....	25 t	Speed	Forward / Reverse	27 / 27 km/h
	Telescope extended.....	18 t		Transmission	Type.....
Stacking height	Telescope extended, open grapple.....	6500 mm	Type of gearshift.....		Automatic
	Telescope extended, closed grapple.....	6000 mm	Number of gears, Forward / Reverse.....		3/3
Reach	From center of driveaxle, max.....	6100 mm	Model	CAT	
Grapple	Grapple size, min / max.....	6.0 - 7.5 m ²	Engine	Type.....	Volvo 12 litres
	Width min / max.....	900 - 1340 mm		Rating ISO 3046.....	313 kW / 426 hp
Dimensions	L1 Telescope extended.....	15000 mm		Torque ISO 3046.....	2100 Nm / 1200 rpm
	L2 Telescope extended.....	5095 mm		Stroke / No of cyl.	4 / 6
	L3.....	8025 mm	Cyl. volume.....	12130 cm ³	
	L4.....	6970 mm			
	H1.....	7155 mm			
	H2, max.....	6000 mm			
Total weight	Standard equipped.....	71000 kg			
Tyres	Driveaxle	18.00x33"			
	Steeraxle.....	18.00x25"			
Brakes	Mainbrake	Wet disc brakes			
	Parking brake.....	Electric spring brake			





Trust. Strength. Performance. True Quality.

SVETRUCK®

Telephone +46 372 866 00 Telefax +46 372 824 50 E-mail info@svetruck.com
Postal address Box 321, SE-341 26 Ljungby, Sweden
Visiting address Långgatan 29, Ljungby, Sweden www.svetruck.com